PFP-20HPKHL-2D

HIGH VOLUME PUMP

This pump is the ideal tool to fill your fire truck, supply your pump truck or carry water over a long distance.

Also available in skid version



ENGINE SPECIFICATIONS

- CH640 Kohler air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 6 gallon (22 l) detachable fuel tank
- 20 amp. charging, regulated

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- Two 2 1/2" (65 mm) delivery outlets with 1/4-turn ball valve
- One 4" (100 mm) suction inlet
- Dimensions: Length: 21 1/4" (540 mm)

Width: 26 1/2" (673 mm); Height: 24" (610 mm)

• Weight: 194 lbs (88 kg)

INCLUDED ACCESSORIES


• Pressure gauge

PERFORMANCE

 490 GPM @ 10 PSI
 260 GPM @ 75 PSI

 430 GPM @ 25 PSI
 165 GPM @ 100 PSI

 350 GPM @ 50 PSI
 90 GPM @ 125 PSI

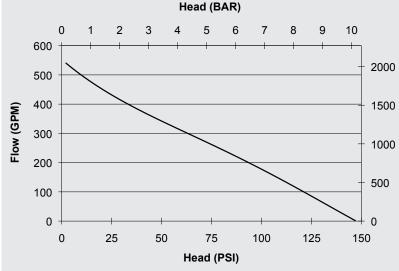

LIMITED WARRANTY

• 3 YEARS



