

PFP-23HPVGD-1D-CE

VANGUARD POWERED HIGH VOLUME PUMP

*This pump is the ideal tool to fill your fire truck,
supply your pump truck or carry water over a long
distance.*

Also available in skid version



ENGINE SPECIFICATIONS

- Vanguard, model 380000, air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 2.25 Gallons (8.5 L) integrated fuel tank

PUMP UNIT SPECIFICATIONS


- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 2 1/2" (65 mm) delivery outlet with Fire Type swing-out valve
- One 4" (100 mm) suction inlet
- Dimensions: Length: 24 3/4" (630 mm)
Width: 26 1/4" (667 mm); Height: 25 3/4" (654 mm)
- Wet weight: 188 lbs (85.5 kg)

INCLUDED ACCESSORIES

- Full control panel with pressure gauge, vacuum gauge, throttle, choke, starter, panel light and priming valve
- 16 Amps alternator
- Low oil alert

PERFORMANCE

MAX FLOW : 550 GPM **350 GPM @ 50 PSI**
MAX PRESSURE : 115 PSI **160 GPM @ 100 PSI**
455 GPM @ 25 PSI

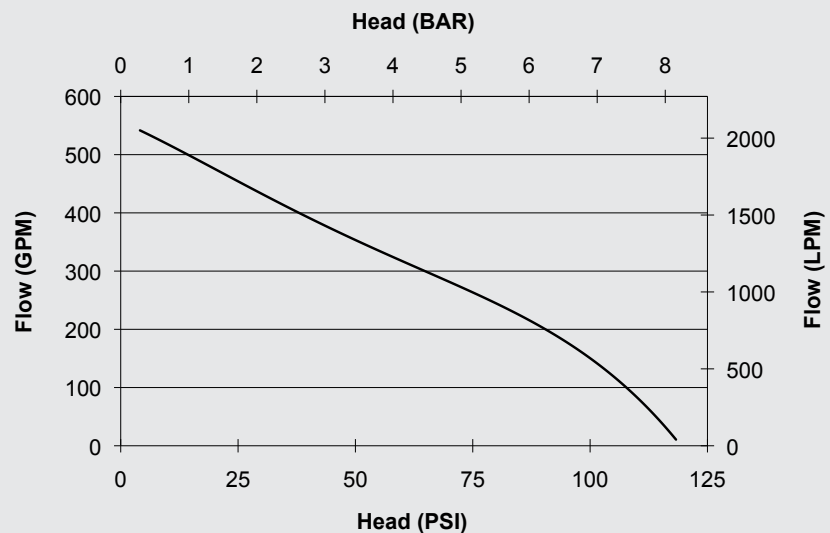

0616

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST