

# SM-PFP-20HPKHL-MR

## PRESSURE AND VOLUME PUMP

*This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on skid frame. The skid version is easily mountable on vehicles and trailers.*

*Also available in portable version*



## ENGINE SPECIFICATIONS

- CH640 Kohler air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 20 amp. charging, regulated

## PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38 mm) NPT-M delivery outlet flange
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 21 1/2" (546 mm); Width: 25" (635 mm) ; Height: 24" (610 mm)
- Wet weight: 156 lbs (71 kg)


## INCLUDED ACCESSORIES

- Throttle control vernier
- Low oil alert
- Pressure gauge
- Quick connect for 12-V battery (Battery NOT included)

## PERFORMANCE

**MAX FLOW: 290 GPM**  
**MAX PRESSURE: 220 PSI**  
**265 GPM @ 50 PSI**

**190 GPM @ 100 PSI**  
**140 GPM @ 150 PSI**  
**60 GPM @ 200 PSI**

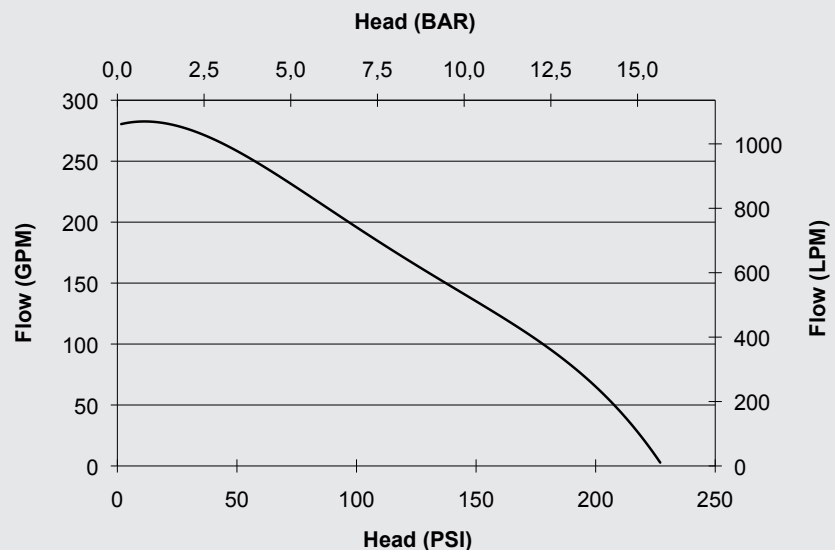

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST