

PFP-23HPVGD-1D

VANGUARD POWERED HIGH VOLUME PUMP

This pump is the ideal tool to fill your fire truck, supply your pump truck or carry water over a long distance.

Also available in skid version



ENGINE SPECIFICATIONS

- Vanguard, model 380000, air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 6 gallon (22 l) detachable fuel tank

PUMP UNIT SPECIFICATIONS


- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 2 1/2" (65 mm) delivery outlet with Fire Type swing-out valve
- One 4" (100 mm) suction inlet
- Dimensions: Length: 21 1/4" (540 mm)
Width: 26 1/2" (673 mm); Height: 24" (610 mm)
- Weight: 165.2 lbs (75 kg)

INCLUDED ACCESSORIES

- 20 Amps alternator
- Pressure gauge
- Low oil alert
- 12-V battery

PERFORMANCE

MAX FLOW : 550 GPM **350 GPM @ 50 PSI**
MAX PRESSURE : 115 PSI **160 GPM @ 100 PSI**
455 GPM @ 25 PSI

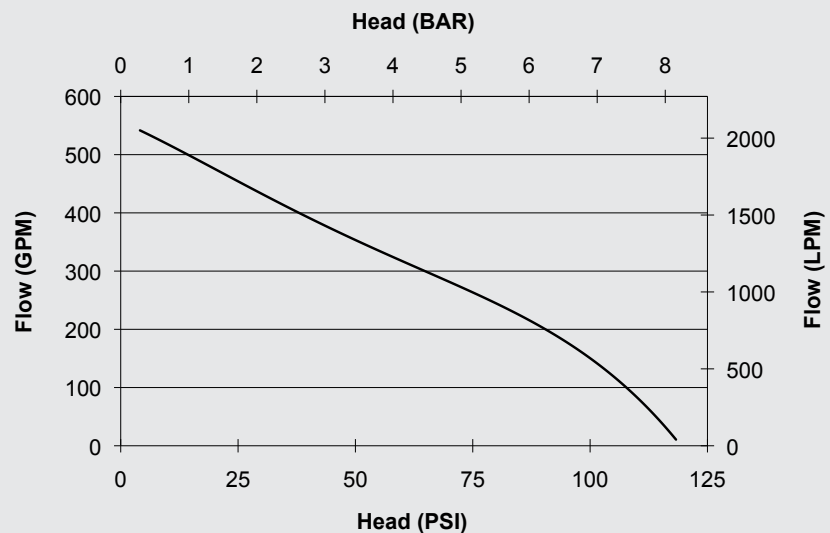

0616

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com