

SM-PFP-21hp-DSL-MR

DIESEL POWERED PUMP

The MR version gives you more pressure to meet the requirements of an initial attack.

Also available in portable version



ENGINE SPECIFICATIONS

- D722 Kubota liquid cooled engine
- 3-cylinder, 4-stroke diesel engine
- 12V electric start
- Alternator capacity: 12V-12.5A (150W)

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Stainless steel pump shaft
- Exhaust priming system, guaranteed up to 15' (4.6 meter) lift
- One 1 1/2" (38mm) NPT-M delivery outlet flange
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 31" (787 mm); Width: 27" (686 mm); Height: 31 1/2" (800 mm)
- Wet weight: 282 lbs (128 kg)


CONTROL PANEL

- Engine ignition switch
- Throttle control vernier
- Operating panel light
- Pilot lights
- Inlet and outlet pressure gauges
- Priming valve
- Engine stop knob

PERFORMANCE

MAX FLOW: 250 GPM
MAX PRESSURE: 190 PSI

230 GPM @ 50 PSI
165 GPM @ 100 PSI
110 GPM @ 150 PSI

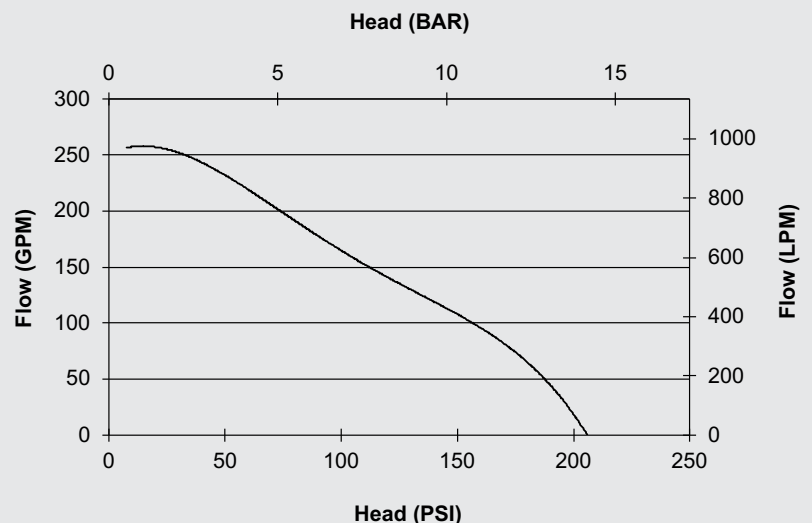

0418

INCLUDED ACCESSORIES


- Quick connect for 12-V battery

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com