

## **PULSATION DAMPENERS**

10

H

# PULSATION DAMPENER

F

#### **Pulsation Dampeners**


- Metallic and Plastic Design
- 3/8, 1/2, 3/4, 1, 1-1/2, 2, 3 Inch Sizes Available
- Automatic Self-Charging and Self-Venting
- Max Pressure 120 PSI (8.2 bar)
- Maximum Operating Temperature
  - ~ Polyethylene 158°F (70°C)
  - ~ PTFE 248°F (120°C)
  - ~ Metal 248°F (120°C)

	PD-038-XXXX	PD-050-XXXX	PD-075-XXXX	PD-100-XXXX	PD-150-XXXX	PD-200-XXXX	PD-300-XXXX
Size	3/8	1/2	3/4	1	1-1/2	2	3
Air Inlet	1/8"	1/8"	1/8"	1/8"	1/4"	1/4"	3/4"
Housing Mater	rial and Fluid Cor	nnection Availab	ility				
Aluminum		MNPT, MBSPT	MNPT, MBSPT	MNPT, MBSPT	MNPT, MBSPT	MNPT, MBSPT	
					ANSI Flange DIN Flange	ANSI Flange DIN Flange	
Stainless Steel		1	MNPT, MBSPT	MNPT, MBSPT	MNPT, MBSPT ANSI Flange DIN Flange	MNPT, MBSPT ANSI Flange DIN Flange	MNPT, MBSPT ANSI Flange DIN Flange
Hygienic Stainless Steel	1/2" Tri-Clamp	1" Tri-Clamp		1" Tri-Clamp	2" Tri-Clamp	2 1/2" Tri-Clamp	3" Tri-Clamp
Polyethylene	MNPT, MBSPT	MNPT, MBSPT	and the	MNPT, MBSPT ANSI Flange DIN Flange			
PTFE	MNPT, MBSPT	MNPT, MBSPT		MNPT, MBSPT ANSI Flange DIN Flange			

C



## MODEL MATRIX AND DIMENSIONS

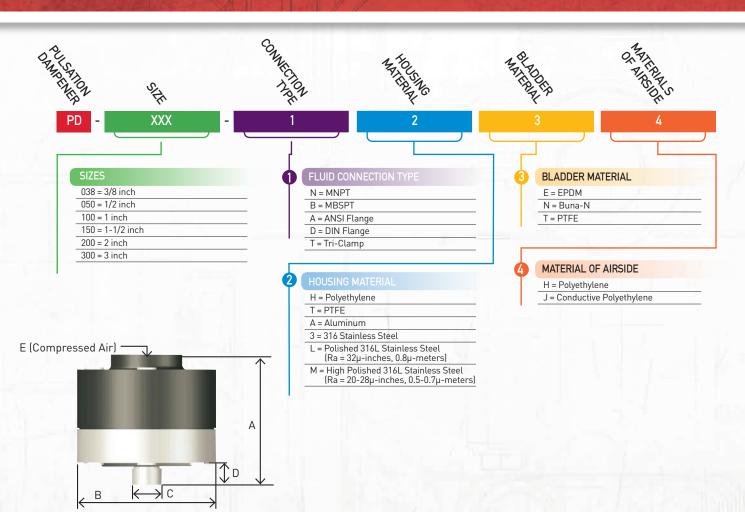

#### Metallic Product Dimensions (NPT and BSP Connectons)

	PD-050-XXXX	PD-07	5-XXXX	PD-10	0-XXXX	PD-150	)-XXXX	PD-20	0-XXXX	PD-300-XXXX
Housing Material	Alu	Alu	SS	Alu	SS	Alu	SS	Alu	SS	SS
A	3.90"	3.90"	5.55"	5.47"	5.55"	6.69"	6.73"	8.46"	9.06"	11.10"
B	4.25"	4.25"	5.91"	6.14"	5.91"	8.03"	8.03"	10.75"	10.75"	14.17"
С	1/2"	3/4"	3/4"	1"	1"	1-1/2"	1-1/2"	2"	2"	3"
D	0.47"	0.59"	0.71"	0.79"	0.71"	0.75"	0.79"	1.26"	1.26"	1.18"
E	1/8"	1/8"	1/8"	1/8"	1/8"	1/4"	1/4"	1/4"	1/4"	1/2"

# E (Compressed Air)

K

В

> c

#### Plastic Product Dimensions (NPT and BSP Connectons)

А

	PD-038-XXXX	PD-050-XXXX	PD-100-XXXX	PD-150-XXXX	PD-200-XXXX	PD-300-XXXX
A	3.39"	3.86"	5.39"	6.69"	8.50"	11.30"
В	2.99"	4.33"	6.14"	8.03"	10.75"	14.17"
С	3/8"	1/2"	1"	1-1/2"	2"	3"
D	0.43"	0.51"	0.71″	0.70"	1.18"	1.02"
E	1/8"	1/8"	1/8"	1/4"	1/4"	1/2"



ALL-FLO is committed to the pursuit of designing and manufacturing the highest quality product available to industry. Since the beginning in 1986, All-Flo engineers have used their extensive knowledge of today's engineered materials, advanced air system logic and manufacturing techniques to develop the superior group of lube-free, air-operated diaphragm pumps found in this catalog. Every pump is performance engineered and quality built to provide trouble-free service under the toughest conditions.

#### YOUR AUTHORIZED ALL-FLO DISTRIBUTOR



7750 Tyler Blvd. Mentor, Ohio 44060 phone: 440.354.1700 fax: 440.354.9466 all-flo.com

13965-PDxxx-Rev\_A5