


# DUPLEX CONTROL PANELS

Three Phase, 230 volt,  
for Sewage, Effluent &  
Non-Clog Pumps

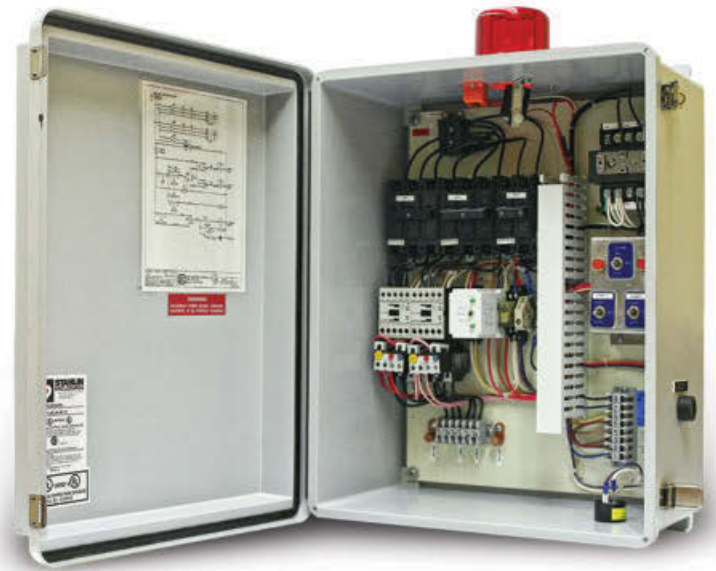

<b>Enclosure</b>	Type 4X Polycarbon
<b>Circuit breaker</b>	For pump and control circuit
<b>Motor starter</b>	IEC rated with class 10 overload
<b>HOA switch</b>	Three position toggle HP rated
<b>Alarm switch</b>	Three position toggle HP rated
<b>Run light</b>	Amber neon pilot light
<b>Transformer</b>	With fuse protection
<b>Alternating relay</b>	With lead selector switch
<b>Moisture sensor*</b>	Seal fail circuit and light
<b>Temp sensor*</b>	Heat sensor connections
<b>Bracket</b>	Bright aluminum
<b>Fuse</b>	Control and alarm sized at 3 amps
<b>Terminal strip</b>	Box type lugs sectional
<b>Wiring</b>	Color coded
<b>Visible alarm</b>	360 degree flashing
<b>Audible alarm</b>	Piezo buzzer
<b>Level control</b>	Requires 4 floats rated at 2 amps
<b>Certifications</b>	UL 508A

\* Requires sensor to be in pump.

Consult factory for other available options. Some options may require an increase in the enclosure size.

Volts	Phase	Amps	Part number
230	3	2.4 - 4	BP23D4XNM004
230	3	4 - 6	BP23D4XNM006
230	3	6 - 10	BP23D4XNM010
230	3	9 - 12	BP23D4XNM012
230	3	10 - 16	BP23D4XNM016
230	3	16 - 18	BP23D4XNM018
230	3	18 - 24	BP23D4XNM024
230	3	24 - 32	BP23D4XNM032
230	3	32 - 40	BP23D4XNM040

NOTE: Overloads must be located in pump.

