

PFP-18HPVGD-MR-CE

PRESSURE AND VOLUME PUMP

This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- 350000 Vanguard air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 2.25 Gallons (8.5 l) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38mm) delivery outlet with Fire Type swing-out valve
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length:23.5" (575 mm); Width:22" (539 mm); Height:25.5" (625 mm)
- Weight: 170 lbs (77 kg)


INCLUDED ACCESSORIES

- Full control panel with pressure gauge, vacuum gauge, throttle, choke, starter, panel light and priming valve
- 16 Amps alternator
- Low oil alert

PERFORMANCE

255 GPM @ 25 PSI
220 GPM @ 50 PSI
140 GPM @ 100 PSI

75 GPM @ 150 PSI
30 GPM @ 175 PSI

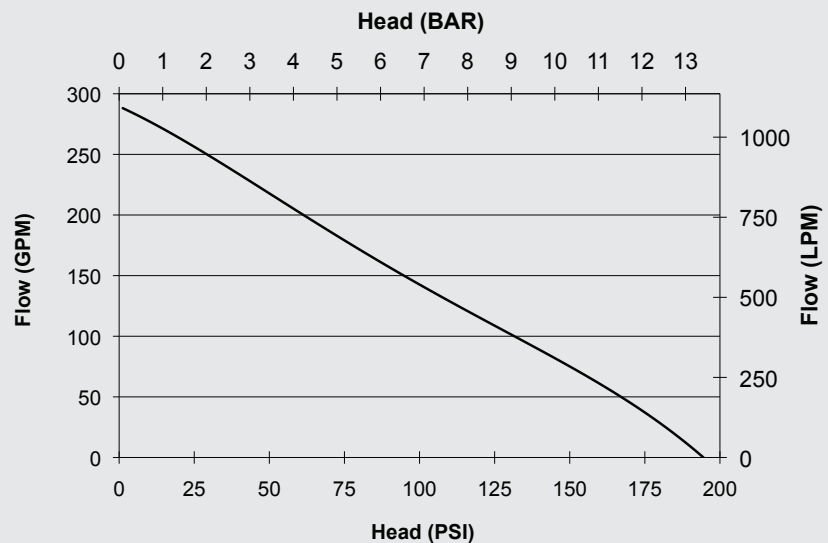

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST